


SIGNATURE SERIES 400A ADJUSTABLE GTW FULL BACK HINGE

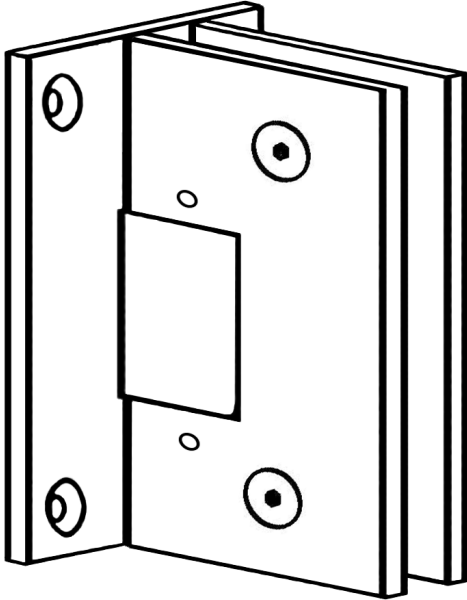

SPECIFICATIONS

- For 3/8" (10 mm) and 1/2" (12 mm) glass,
- use two (2) hinges with a maximum weight of 110 lb (50 kg) and a width of 36" (914 mm)
 - use three (3) hinges with a maximum weight of 140 lb (63 kg) and a width of 36" (914 mm)

ASSEMBLY

For 3/8" (10 mm) glass use one thick rubber on each side

For 1/2" (12 mm) glass use one thin rubber on each side

CAUTION

Power tools should not be used to compress the hinge on the glass.



**Southeastern
Aluminum
Products, Inc.**

*Maximum Door Capacities	3/8" (10 mm) Glass		1/2" (12 mm) Glass	
	Weight	Width	Weight	Width
Using 2 Hinges	110 lbs. (50 kg)	36" (914 mm)	110 lbs. (50 kg)	36" (914 mm)
Using 3 Hinges	140 lbs. (63 kg)	36" (914 mm)	140 lbs. (63 kg)	36" (914 mm)

SIGNATURE SERIES 400A ADJUSTABLE GTW FULL BACK HINGE

